FICER Technology Co., Ltd.
明虹科技股份有限公司

2F, No.138, Daye Rd., Beitou Dist.,
Taipei City 112030, Taiwan
www.Ficer.com

SKU: 03M0A03

125M SFP GE-100LX SGMII Transceiver
Hot Pluggable, Duplex LC, 1310nm FP, SMF 10km, DDM, C-Temp

Part Number: FSFP-A7-S13-10D-GEP



Overview

FSFP-A7-S13-10D-GEP Small Form Factor Pluggable SFP transceivers are compliant with the current SFP Multi-Source Agreement (MSA) Specification. The high performance uncooled 1310nm FP transmitter and high sensitivity PIN receiver provide superior performance for Fast Ethernet applications up to SMF 10km optical links. It is a SFP-GE-100LX modules operate in Gigabit Ethernet port with SGMII interface and interoperable with industrywide interfaces compliant to the IEEE 100BASE-LX10 standard.

Applications

- Fast Ethernet 100BASE-LX @125M
- Switch to Switch Interface

Features

- Compatible with IEEE802.3ah 100BASE-LX10
- Compliant with INF-8074i SFP MSA
- Built-in Marvell PHY supporting SGMII interface
- Hot Pluggable
- 1310nm FP laser transmitter and PIN receiver
- Duplex LC connector
- 2-wire interface for management and diagnostic monitor with SFF-8472
- Single +3.3V power supply
- Link distance 10km over SM fiber
- Operating Temperature 0~+70°C
- Maximum Power consumption 1W
- RoHS Compliant

Laser Safety

- This is a Class 1 Laser Product complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed. 3., as described in Laser Notice No. 56, dated May 8, 2019.
- Caution: Use of control or adjustments or performance of procedure other than those specified herein may result in hazardous radiation exposure.

TEL+886-2-2898-3830 FAX+886-2-2898-3840 Sales@Ficer.com

SKU: 03M0A03

Absolute Maximum Ratings

Parameters	Symbol	Min.	Max.	Unit
Storage Temperature	TST	-40	+85	°C
Relative Humidity	RH	5	85	%
Supply Voltage	VCC	-0.5	+3.6	V

Recommended Operating Conditions

Parameters	Symbol	Min.	Typ.	Max.	Unit
Case Operating Temperature	TOP	0	-	+70	°C
Supply Voltage	VCC	+3.13	+3.3	+3.47	V
Supply Current	ICC			300	mA
Power Consumption	P			1	W
Host Interface		SGMII			
Optical Interface		100BASE-LX10			

Transmitter Electro-optical Characteristics

VCC = 3.13V to 3.47V, TOP = 0 °C to +70 °C

Parameters	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Line Rate			125		Mb/s	
Optical Launch Power	Po	-15		-8	dBm	1
Optical Center Wavelength	λc	1260	1310	1360	nm	
Spectral Width (RMS)	Δλ			3	nm	
Optical Extinction Ratio	ER	9			dB	
Optical Eye Mask		IEEE802.3ah				
Relative Intensity Noise	RIN			-120	dB/Hz	
Differential Data Input Swing	VIN	250		1200	mV	
Tx Disable Input Voltage-Low (Tx ON)	TDISVL	GND		0.8	V	
Tx Disable Input Voltage-High (Tx OFF)	TDISVH	2.0		Vcc	V	
Tx Fault Output Voltage-Low (Tx Normal)	TFLTVL	GND		0.8	V	
Tx Fault Output Voltage-High (Tx Fault)	TFLTVH	2.0		Vcc	V	

Note1: The optical power is launched into a 9/125μm single mode fiber.

SKU: 03M0A03


Receiver Electro-optical Characteristics

V_{CC} = 3.13V to 3.47V, T_{OP} = 0 °C to +70 °C

Parameters	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Line Rate			125		Mb/s	
Receiver Sensitivity	SEN			-28	dBm	1
Maximum Receive Power	P_{Rx-MAX}	-8			dBm	1
Optical Center Wavelength	λc	1260		1360	nm	
LOS De-Assert	LOS_D			-29	dBm	
LOS Assert	LOS_A	-40			dBm	
LOS Hysteresis	LOS_{HY}	0.5		4.5	dB	
Differential Data Output Swing	V_{OUT}	300		800	mV	
Receiver LOS Signal Output Voltage-Low	$LOSV_L$	GND		GND+0.5	V	
Receiver LOS Signal Output Voltage-High	$LOSV_H$	Vcc-0.5		Vcc	V	

Note1: Measured with a PRBS 2^7-1 test pattern @125Mbps BER<10^{-10}.

Pin Assignment

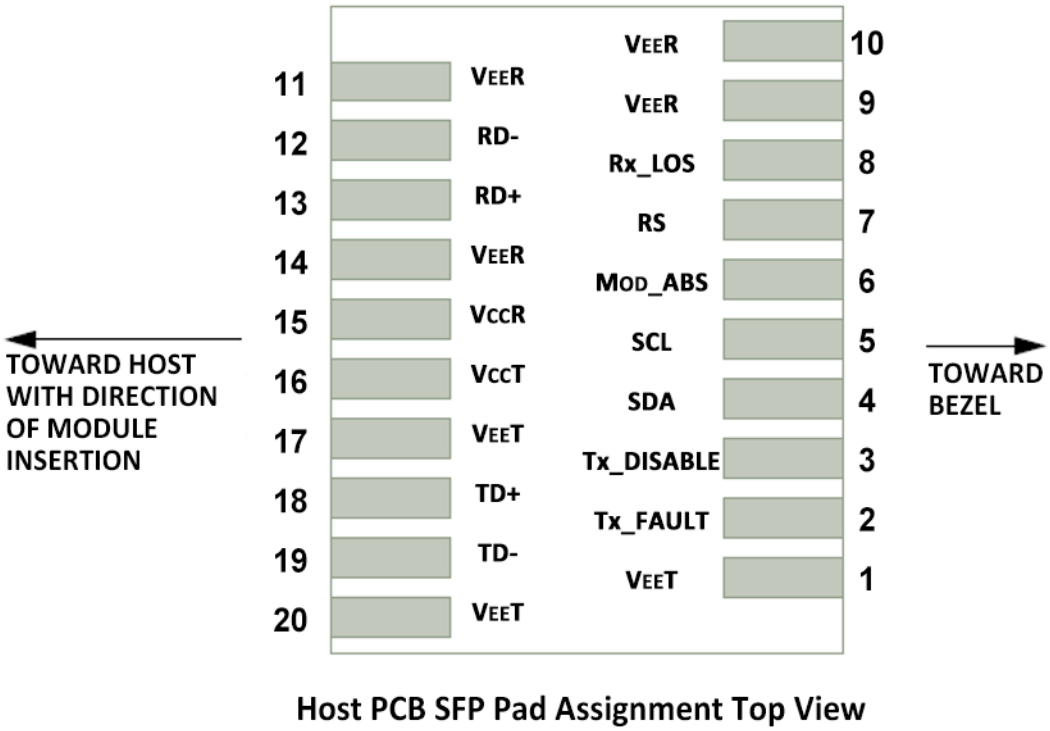

Host PCB SFP Pad Assignment Top View

TEL+886-2-2898-3830 FAX+886-2-2898-3840 Sales@Ficer.com

SKU: 03M0A03

Pin Description

Pin	Name	Function / Description
1	VEET	Transmitter Ground
2	Tx_FAULT	Transmitter Fault Indication (1)
3	Tx_DISABLE	Transmitter Disable – Turns off transmitter laser output (2)
4	SDA	2-wire Serial Interface Data Line (SDA: Serial Data Signal) (3)
5	SCL	2-wire Serial Interface Clock (SCL: Serial Clock Signal) (3)
6	MOD_ABS	Module Absent, connected to VEET or VEER in the module (3)
7	RS	Rate Select, optional (5)
8	Rx_LOS	Receiver Loss of Signal Indication (4)
9	VEER	Receiver Ground
10	VEER	Receiver Ground
11	VEER	Receiver Ground
12	RD-	Receiver Inverted Data output, Differential LVPECL, AC coupled
13	RD+	Receiver Non-Inverted Data output, Differential LVPECL, AC coupled
14	VEER	Receiver Ground
15	VCCR	Receiver 3.3V Power Supply
16	VCCT	Transmitter 3.3V Power Supply
17	VEET	Transmitter Ground
18	TD+	Transmitter Non-Inverted Data Input, Differential LVPECL, AC coupled
19	TD-	Transmitter Inverted Data Input, Differential LVPECL, AC coupled
20	VEET	Transmitter Ground

Note1: Tx Fault is open collector/drain output which should be pulled up externally with a 4.7K~10KΩ resistor on the host board to supply <VccT+0.3V or VccR+0.3V. When high, this output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to <0.8V.

Note2: Tx Disable input is used to shut down the laser output per the state table below. It is pulled up within the module with a 4.7K~10KΩ resistor. 1) Low(0~0.8V): Transmitter on; 2) Between(0.8V and 2V): Undefined; 3) High (2.0~ VccT): Transmitter Disabled; 4) Open: Transmitter Disabled.

Note3: These are the module definition pins. They should be pulled up with a 4.7K~10KΩ resistor on the host board to supply less than VccT+0.3V or VccR+0.3V. MOD_ABS is grounded by the module to indicate that the module is present.

Note4: Rx_LOS (Loss of signal) is an open collector/drain output which should be pulled up externally with a 4.7K~10KΩ resistor on the host board to supply <VccT+0.3V or VccR+0.3V. When high, this output indicates the received optical power is below the worst case receiver sensitivity (as defined by the standard in use). Low indicates normal operation. In the low state, the output will be pulled to <0.8V.

Note5: No connect on this module.

SKU: 03M0A03

Digital Diagnostic Functions

As defined by the SFP MSA (SFF-8472) Ficer's SFP transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:


- Transceiver temperature
- Laser bias current
- Transmitted optical power
- Received optical power
- Transceiver supply voltage

It also provides a sophisticated system of alarm and warning flags, which may be used to alert end-users when particular operating parameters are outside of a factory-set normal range.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Controller (DDC) inside the transceiver, which is accessed through the 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL pin) is generated by the host. The positive edge clocks data into the SFP transceiver into those segments of its memory map that are not write-protected. The negative edge clocks data from the SFP transceiver. The serial data signal (SDA pin) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially.
For more detailed information including memory map definitions, please see the SFP MSA (SFF-8472) Specification.

SKU: 03M0A03

Digital Diagnostic Memory Map

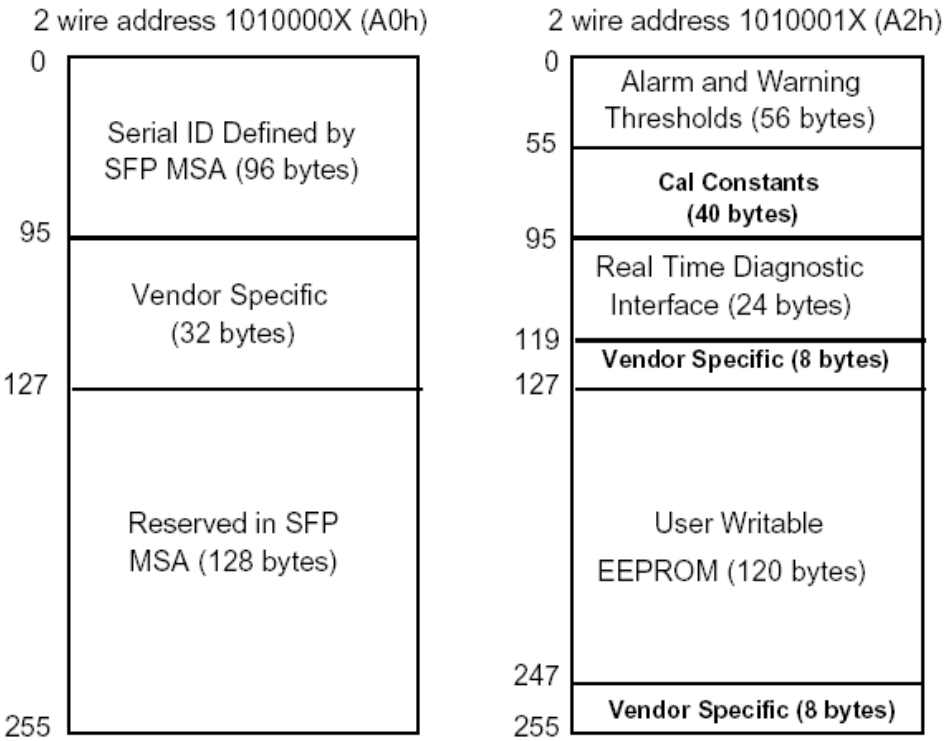


Digital Diagnostic Monitoring Characteristics

Parameter	Accuracy	Unit	Note
Temperature	±3	°C	Internal Calibration
Supply Voltage	±0.1	V	Internal Calibration
Tx Bias Current	±5	mA	Internal Calibration
Tx Output Power	±3	dB	Internal Calibration
Rx Received Optical Power	±3	dB	Internal Calibration

TEL+886-2-2898-3830 FAX+886-2-2898-3840 Sales@Ficer.com

SKU: 03M0A03

Mechanical Dimensions

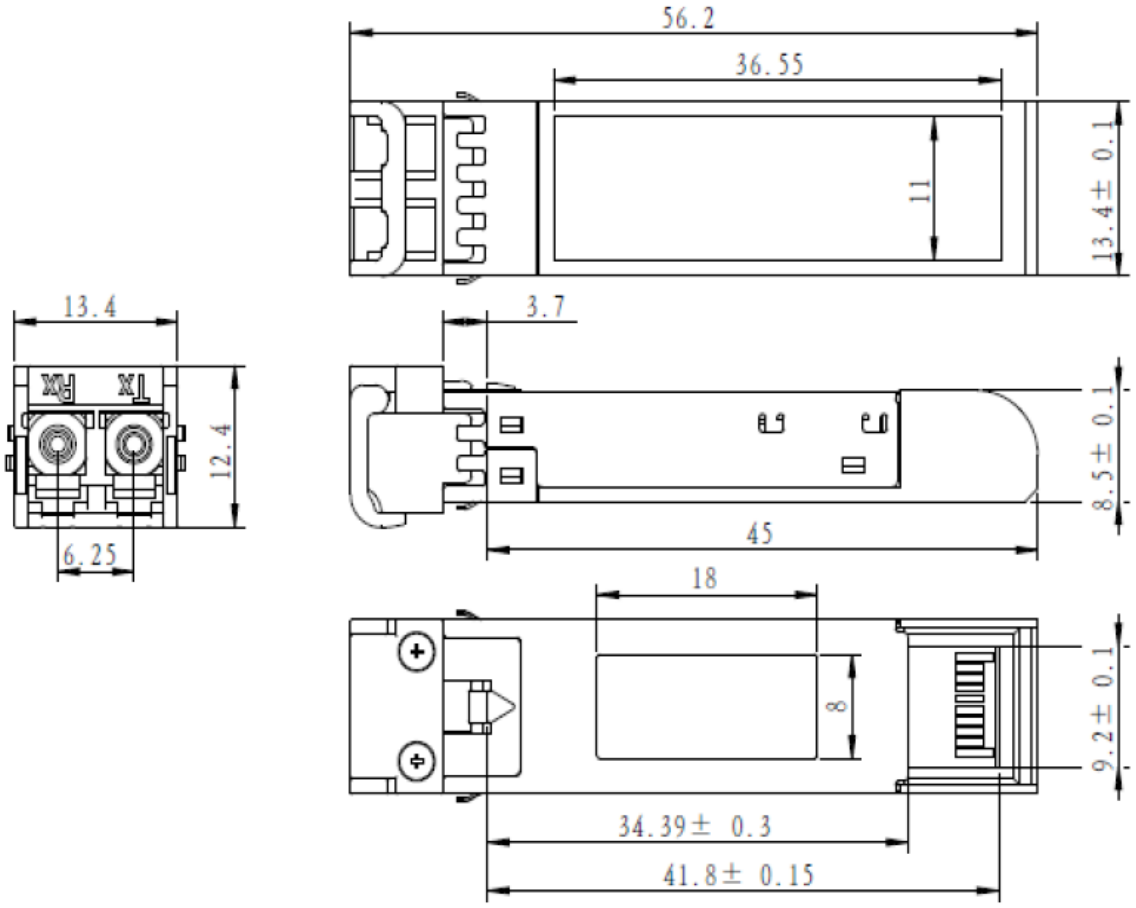

(All Dimensions are ±0.20mm Unless Otherwise Specified, Unit: mm)

Ordering Information

Part No.	Tx	Rx	Link	DDM	Temp.
FSFP-A7-S13-10D-GEP (Blue Latch)	1310nm	1260nm ~ 1360nm	SMF 10km	Yes	0~+70°C

Note: Distances are indicative only. To calculate a more precise link budget based on specific conditions in your application, please refer to the optical characteristics.